



## INMR

### FLOAT LEVEL SWITCH

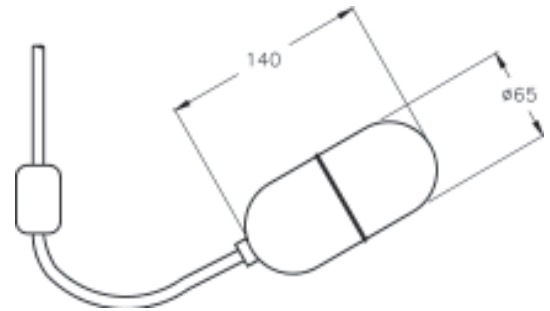


Funtion	Control of maximum and/or minimum level when filling or emptying.
Application	Clean and residuals waters without crusts growing.
Attachment	By the cable.
Float material	Antishock polystyrene.
Counterweight material	Inox AISI303 (1.4305)
Cable	Butylic cable, 3 x 1 mm <sup>2</sup> (high flexibility).
Cable length	2 m (Opcional 5-10-15-20-25-30 m).
Contact type	Micro-switch 1 inversor.
Maximum voltage	250 VAC
Maximum current	15 A 250 VAC
Pressure	4 Kg/cm <sup>2</sup>
Density	0,8 g/cm <sup>3</sup>
Operation temperature	+60 °C
Dimensions	Ø65 x 140 mm.
Weight	176 gr approx. (without cable) Counterweight: 345 gr
Protection	IP68

#### Installation examples

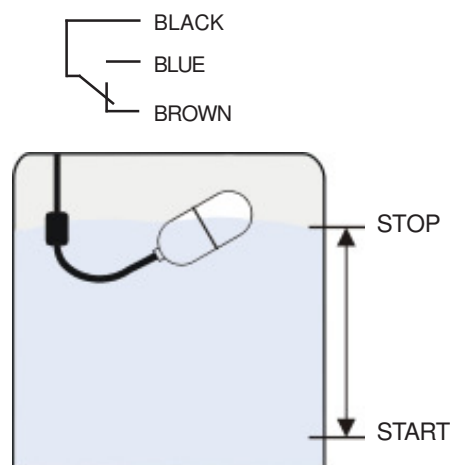

#### FILLING

Stop in filling, start in emptying

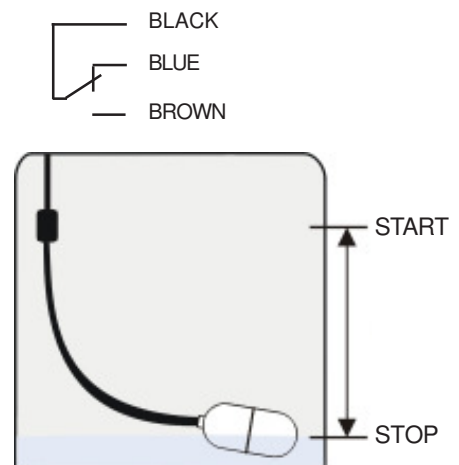

#### EMPTYING

Start in filling, stop in emptying